










ESTROBOS DE CABLE DE ACERO


ESTROBOS DE UN BRAZO									
CABLE DE ACERO CON ALMA DE FIBRA									
6X25	Diámetro Del Cable (Pulgadas)	Carga de Seguridad (Toneladas)							
		Carga Seguridad	Recto 	Lazada 	En U 	30° 	45° 	90° 	120° 
	1/4	0.50	0.50	0.38	1.00	0.97	0.79	0.70	0.50
	5/16	0.77	0.77	0.56	1.54	1.48	1.23	1.08	0.77
	3/8	1.10	1.10	0.80	2.20	2.12	1.76	1.54	1.10
	7/16	1.50	1.50	1.10	3.00	2.89	2.40	2.10	1.49
	1/2	1.94	1.94	1.42	3.88	3.74	3.10	2.72	1.93
	9/16	2.44	2.44	1.78	4.88	4.71	3.90	3.42	2.43
	5/8	3.02	3.02	2.20	6.04	5.83	4.83	4.23	3.00
	3/4	4.32	4.32	3.15	8.64	8.34	6.91	6.06	4.30
	7/8	5.84	5.84	4.26	11.68	11.28	9.34	8.19	5.81
	1	7.58	7.58	5.53	15.16	14.64	12.12	10.62	7.64
6X36	1-1/8	9.54	9.54	6.96	19.08	18.43	15.26	13.37	9.49
	1-1/4	11.72	11.72	8.55	23.44	22.64	18.75	16.43	11.66
	1-3/8	14.10	14.10	10.29	28.20	27.23	22.56	19.76	14.03
	1-1/2	16.70	16.70	12.19	33.40	32.26	26.72	23.40	16.62
	1-3/4	22.40	22.40	16.35	44.80	43.27	35.84	31.39	22.29
	1-7/8	25.60	25.60	18.69	51.20	49.45	40.96	35.88	25.60
	2	29.00	29.00	21.17	58.00	56.02	46.40	40.65	28.86



ESTROBOS DE UN BRAZO									
CABLE DE ACERO CON ALMA DE ACERO									
6X25	Diámetro Del Cable (Pulgadas)	Carga de Seguridad (Toneladas)							
		Carga Seguridad	Recto 	Lazada 	En U 	30° 	45° 	90° 	120° 
	1/4	0.55	0.55	0.41	1.10	1.06	0.87	0.77	0.55
	5/16	0.85	0.85	0.62	1.7	1.64	1.36	1.20	0.85
	3/8	1.21	1.21	0.88	2.42	2.33	1.93	1.71	1.21
	7/16	1.65	1.65	1.20	3.30	3.18	2.64	2.33	1.65
	1/2	2.13	2.13	1.55	4.26	4.11	3.40	3.01	2.13
	9/16	2.69	2.69	1.96	5.38	5.19	4.30	3.80	2.69
	5/8	3.33	3.33	2.43	6.66	6.43	5.32	4.70	3.33
	3/4	4.75	4.75	3.46	9.50	9.17	7.60	6.71	4.75
	7/8	6.42	6.42	4.68	12.84	12.40	10.27	9.07	6.42
	1	8.34	8.34	6.08	16.68	16.11	13.34	11.79	8.34
6X36	1-1/8	10.26	10.26	7.49	20.52	19.82	16.41	14.50	10.26
	1-1/4	12.60	12.60	9.20	25.20	24.34	20.16	17.81	12.60
	1-3/8	15.14	15.14	11.05	30.28	29.24	24.22	21.41	15.14
	1-1/2	17.94	17.94	13.09	35.88	34.65	28.70	25.37	17.94
	1-3/4	24.20	24.20	17.66	48.40	46.74	38.72	34.22	24.20
	1-7/8	27.60	27.60	20.14	55.20	53.31	44.16	39.03	27.80
	2	31.20	31.20	22.77	62.40	60.27	49.92	44.12	31.20



MODELO B -ESTROBOS DE DOS BRAZOS-

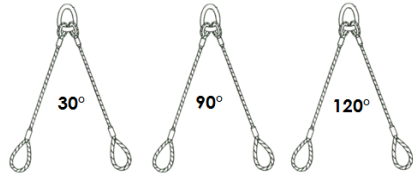

Pulg	Tons	Tons	Tons	Argolla	
				redonda	pera
				Pulg	Pulg
1/4	0.97	0.70	0.50	-	1/2
5/16	1.48	1.08	0.77	-	5/8
3/8	2.12	1.54	1.10	7/8	3/4
7/8	2.89	2.10	1.49	7/8	7/8
1/2	3.74	2.72	1.93	1	7/8
9/16	4.71	3.42	2.43	1-1/8	1
5/8	5.83	4.23	3.00	1-1/4	1-1/4
3/4	8.34	6.06	4.30	1-3/8	1-3/8
7/8	11.28	8.19	5.81	-	1-1/2
1	14.64	10.62	7.64	-	1-3/4
1-1/8	18.43	13.37	9.49	-	2
1-1/4	22.64	16.43	11.66	-	2-1/4
1-3/8	27.23	19.76	14.03	-	2-1/2
1-1/2	32.26	23.40	16.62	-	2-3/4
1-3/4	43.27	31.39	22.29	-	3
1-7/8	49.45	35.88	25.60	-	3-1/4
2	56.02	40.65	28.86	-	3-1/2

MODELO C -ESTROBOS DE TRES BRAZOS-



Pulg	Tons	Tons	Tons	Argolla	
				redonda	pera
				Pulg	Pulg
1/4	1.45	1.05	0.75	-	5/8
5/16	2.22	1.62	1.15	7/8	3/4
3/8	3.18	2.31	1.65	7/8	7/8
7/16	4.33	3.15	2.23	1	1
1/2	5.61	4.08	2.89	1-1/4	1-1/4
9/16	7.06	5.13	3.64	1-3/8	1-1/4
5/8	9.06	6.34	4.50	-	1-3/8
3/4	12.96	9.09	6.45	-	1-3/4
7/8	17.52	12.28	8.71	-	2
1	22.74	15.93	11.46	-	2-1/4
1-1/8	28.62	20.05	14.23	-	2-1/2
1-1/4	33.96	24.64	17.49	-	2-3/4
1-3/8	40.84	29.64	21.04	-	3
1-1/2	48.39	35.10	24.93	-	3-1/4
1-1/2	48.39	35.10	24.93	-	3-1/4
1-3/4	64.90	47.08	33.43	-	3-3/4

MODELO D -ESTROBOS DE CUATRO BRAZOS-



Pulg	Tons	Tons	Tons	Argolla	
				redonda	pera
				Pulg	Pulg
1/4	1.93	1.40	1.00	-	3/4
5/16	2.96	2.16	1.54	7/8	7/8
3/8	4.24	3.08	2.20	1	1
7/16	5.78	4.20	2.98	1-1/4	1-1/4
1/2	7.48	5.44	3.86	1-1/4	1-1/4
9/16	9.42	6.84	4.86		1-1/2
5/8	11.66	8.46	6.00	-	1-3/4
3/4	16.68	12.12	8.60	-	2
7/8	22.56	16.38	11.62	-	2-1/4
1	29.28	21.24	15.28	-	2-1/2
1-1/8	36.86	26.74	18.98	-	2-3/4
1-1/4	45.28	32.86	23.32	-	3
1-3/8	54.46	39.52	28.06	-	3-1/2
1-1/2	64.52	46.80	33.24	-	3-3/4

